

UL Listed Raintight EMT Steel Compression Connectors & Couplings

Type 7000SR Raintight Connectors

Use:

To ground and secure EMT raceway to boxes and enclosures in wet locations.

Features:

- UL Listed Raintight
- InspectoRidge™ external visual inspection aid – See below
- No disassembly required
- Male hub threads NPS
- Available with and without insulated throat
- Concretetight

Material/Finish:


- Steel Body & Nut Zinc Electroplated
- Silicone Rubber Internal Sealing Ring
- EPDM Rubber KO Sealing Ring

Trade Size (inches)	Catalog Number	Insulated Throat Catalog Number	Dimensions in Inches		
			Body Length	Max Dia.	Thread Length
1/2	7050SR	7050SRT	1 ²⁹ / ₃₂	1 ⁵ / ₃₂	7/16
3/4	7075SR	7075SRT	1 ³¹ / ₃₂	1 ³ / ₈	7/16
1	7100SR	7100SRT	2 ¹ / ₈	1 ³ / ₄	1 ⁵ / ₃₂



Type 7050SR – Type 7100SR

Third Party Certification:

 UL Listed: E-14895
Listed Raintight

Applicable Third Party Standards:

UL Standard: 514B
NEMA: FB-1
Federal Spec: W-F-408E

Type 6000SR Raintight Couplings

Use:

To ground and secure EMT raceway sections together in wet locations.

Features:

- UL Listed Raintight
- InspectoRidge™ external visual inspection aid – See below
- No assembly required

Material/Finish:


- Steel Body & Nut Zinc Electroplated
- Silicone Rubber Internal Sealing Rings

Trade Size (inches)	Catalog Number	Dimensions in Inches	
		Body Length	Max. Dia.
1/2	6050SR	2 ²⁵ / ₃₂	1 ¹ / ₈
3/4	6075SR	3	1 ¹¹ / ₃₂
1	6100SR	3 ¹¹ / ₃₂	1 ¹ / ₈




Type 6050SR – Type 6100SR

Third Party Certification:

 UL Listed: E-14895
Listed Raintight

Applicable Third Party Standards:

UL Standard: 514B
NEMA: FB-1
Federal Spec: W-F-408E

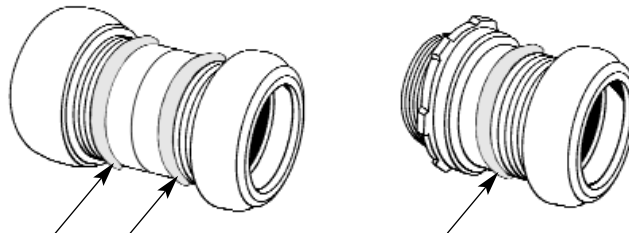

InspectoRidge™

Provides external visual inspection aid on outside surface, to assure raintight fittings are installed, without disassembly of conduit run.